


SHOWER

Z94265

Soffione a getto fisso, Ø 200 mm. / Ø 200 mm shower head.

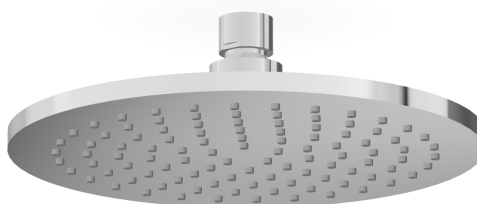

Soffione Ø 200 mm in ottone, a getto fisso con sistema anticalcare. Spessore 8 mm. Ispezionabile.
Water Saving - portata d'acqua uguale o inferiore a 9 l/min

Ø 200 mm brass shower head, with anti-limescale system. 8 mm thickness. Inspectionable.
Water Saving - water flow rate of 9 L/min or less.


Finiture / Finishes

 Croma / Chrome	 C3 Nickel Spazzolato / Brushed Nickel	 C8 Nickel Lucido / Polished Nickel	 C40 Oro / Gold	 C41 Oro spazzolato / Brushed Gold	 C50 Metal Black / Metal Black	 C51 Metal Black spazzolato / Brushed Metal Black
 W1 Bianco Opaco Goffrato / Embossed Matt White	 N1 Nero Opaco Goffrato / Embossed Matt Black	 N6 Nero opaco / Matt black	 L5 Blu mediterraneo / Mediterranean blu	 P21 PVD brushed chocolate / PVD brushed chocolate	 P31 Brushed PVD British gold / Brushed PVD British gold	 P41 PVD Oro Spazzolato / PVD Brushed Gold
 P81 Brushed total black PVD / Brushed total black PVD	 P91 Brushed PVD Copper / Brushed PVD Copper	 J3 Glossy gesso / Glossy gesso	 K7 Pearl cipria / Pearl cipria	 R6 Pearl chili / Pearl chili	 V7 Pearl salvia / Pearl salvia	 V8 Matt mirto / Matt mirto

SHOWER

Z94265

Disegno Complessivo / Overall Drawing

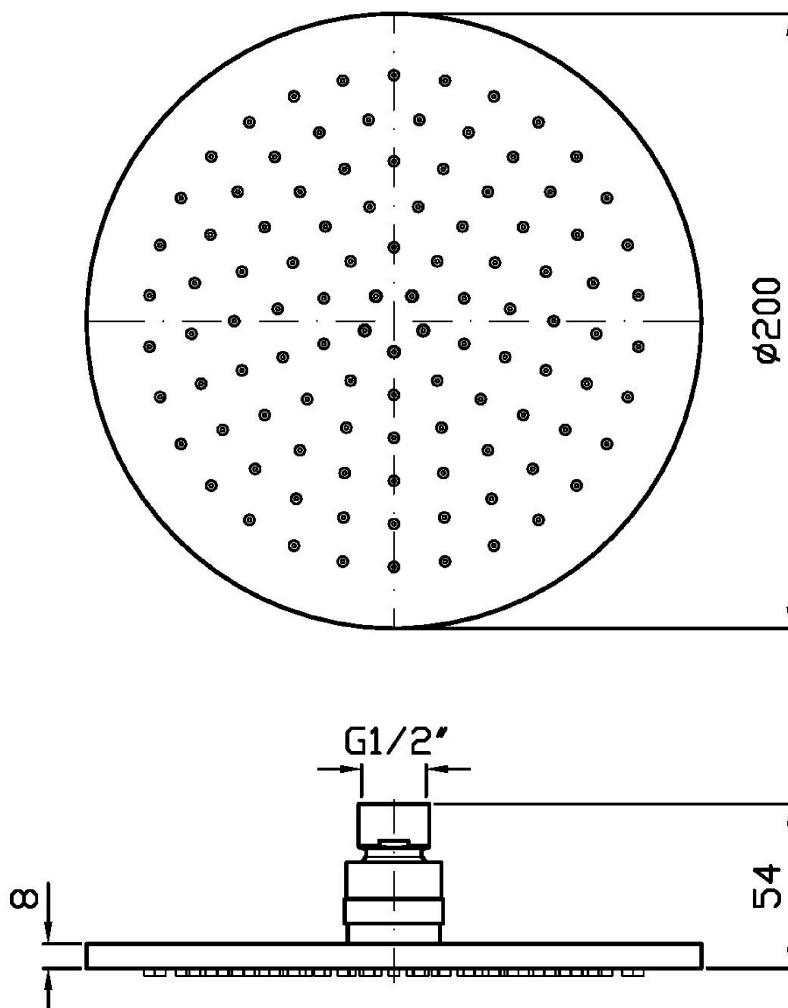


Note / Notes

SHOWER

Z94265

Portate / Flowrates (lt/min)

PRESSIONE PRESSURE	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR
SOFFIONE SHOWER HEAD P1	9	9	9	9	9
P2					
P3					
P4					
P5					

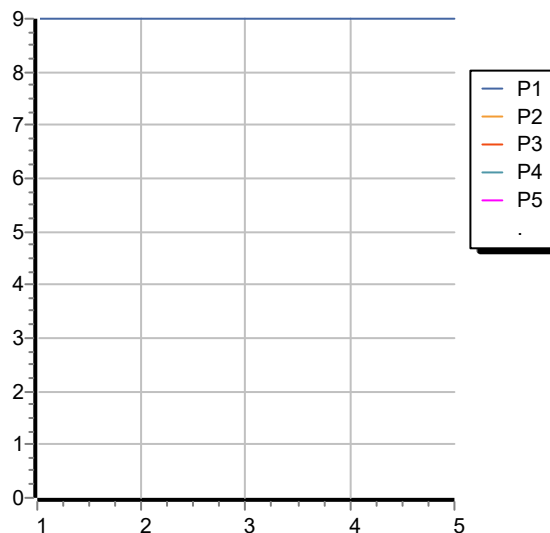

SHOWER

Z94265

Pesi e Misure / Weights and Sizes

Peso (Kg) Weight (lb)	1,01 (Kg)	2,23 (lb)
Volume test (dc3) - (in3)	3,40 (dc3)	207,48 (in3)
h (mm) - (in)	70,00 (mm)	2,76 (in)
L1 (mm) - (in)	215,00 (mm)	8,46 (in)
L2 (mm) - (in)	227,00 (mm)	8,94 (in)

