


Versione idronica e mista

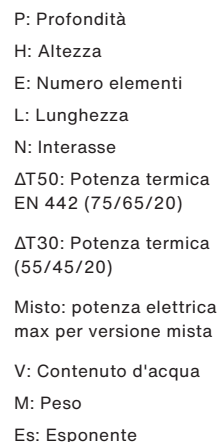

Modello	P mm	H mm	E nr	L mm	N mm	ΔT50 Watt	ΔT30 Watt	Misto Watt	V dm³	M kg	Es n
AUR-080-045-3580-9016	30	775	16	450	400	326	177	300	3,4	5,3	1,20
AUR-080-050-3580-9016	30	775	16	500	450	357	193	300	3,6	5,8	1,20
AUR-080-055-3580-9016	30	775	16	550	500	389	211	300	3,9	6,2	1,20
AUR-080-060-3580-9016	30	775	16	600	550	420	229	300	4,1	6,6	1,19
AUR-120-045-3580-9016	30	1217	22	450	400	469	250	300	4,8	7,7	1,23
AUR-120-050-3580-9016	30	1217	22	500	450	511	273	300	5,2	8,3	1,23
AUR-120-055-3580-9016	30	1217	22	550	500	553	295	300	5,6	8,9	1,23
AUR-120-060-3580-9016	30	1217	22	600	550	595	317	300	5,9	9,6	1,23
AUR-120-075-3580-9016	30	1217	22	750	700	721	385	600	7,0	11,4	1,23
AUR-150-045-3580-9016	30	1469	28	450	400	576	306	300	6,0	9,6	1,24
AUR-150-050-3580-9016	30	1469	28	500	450	629	334	600	6,5	10,4	1,24
AUR-150-055-3580-9016	30	1469	28	550	500	683	363	600	6,9	11,2	1,24
AUR-150-060-3580-9016	30	1469	28	600	550	737	391	600	7,4	11,9	1,24
AUR-150-075-3580-9016	30	1469	28	750	700	899	480	900	8,7	14,3	1,23
AUR-180-045-3580-9016	30	1856	34	450	400	719	382	600	7,4	12,0	1,24
AUR-180-050-3580-9016	30	1856	34	500	450	786	417	600	8,0	12,8	1,24
AUR-180-055-3580-9016	30	1856	34	550	500	854	453	600	8,5	13,7	1,24
AUR-180-060-3580-9016	30	1856	34	600	550	922	489	900	9,1	14,6	1,24
AUR-180-075-3580-9016	30	1856	34	750	700	1125	597	900	10,7	17,3	1,24

AUR	080	040	3580	9016
ZEHNDER AURA	ALTEZZA	LARGHEZZA	ALLACCIAMENTO	FINITURA


Versione idronica e mista



LETTURA CODICE PRODOTTO (es. **AUR-080-040-3580-0008**)

5

Versione idronica e mista

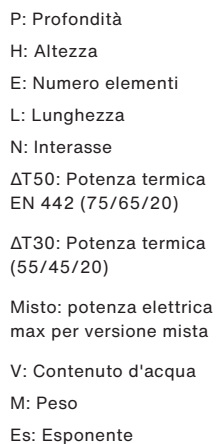

Modello	P mm	H mm	E nr	L mm	N mm	ΔT50 Watt	ΔT30 Watt	Misto Watt	V dm³	M kg	Es n
AUR -080-050-3580-9205	30	775	16	500	450	357	193	300	3,6	5,8	1,20
AUR -120-050-3580-9205	30	1217	22	500	450	511	273	300	5,2	8,3	1,23
AUR -150-050-3580-9205	30	1469	28	500	450	629	334	600	6,5	10,4	1,24
AUR -180-050-3580-9205	30	1856	34	500	450	786	417	600	8,0	12,8	1,24

AUR	080	050	3580	9205
ZEHNDER AURA	ALTEZZA	LARGHEZZA	ALLACCIAMENTO	FINITURA